

Dry Block Temperature Calibrator


Instrument



Carrying Case



Multi-Hole Insertion Tube

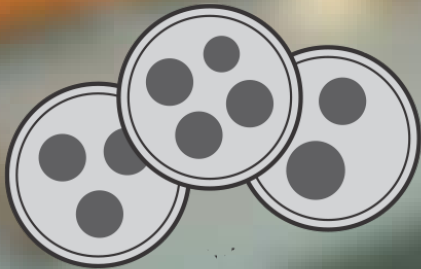

Application:

Ideal for calibration of thermocouples, RTDs, gauges, thermometers, switches, transmitters, etc.

Features:

Dry Block . Graphical Display . Microcontroller Based . Feather Touch Key Pad . Fast Heating & Cooling . Reads Set temperature and device input simultaneously . Good Stability . Loop Power Supply for Transmitters . Facility to check Temperature Switch Test . Measurement Facility for RTD, Thermocouple, mV, V, mA, Ohms . Internal Cold Junction Compensation

Resolution	0.1°C
Units	°C / °F Switchable
Display	Graphical with LED Backlight
Power Supply	230V AC ± 5% / 50Hz, 1.2 KW for 650UTC & 500 W for 350UTC
Transmitter Supply	24V DC ± 10% (Loop Powered)
Block Diameter	25.4 mm
Block Depth	120 mm
Insertion Tube Depth	110 mm
Temperature Setting	Digital Display through feather touch keypad
Display Stability	±0.2°C
Radial Uniformity	±0.3°C with similar probes
Fixed Steps for temp. setting in °C	50, 150, 300, 450, 600
Switch Test	Continuity check with OPEN / CLOSE indication

Measurement Specification

Parameter	Range	Resolution	Accuracy ¹
mA	0 to 25 mA	0.001 mA	±0.025% of Reading + 10 µA
mV	0 to 1000.0 mV	0.01 mV	±0.025% of Reading + 0.25 mV
Volts	0 to 10.000 V	0.001 V	±0.025% of Reading + 3 mV
Ohms	0 to 400 Ohms	0.01 Ohms	±0.025% of Reading + 0.1 Ohm
RTD3 (Pt 100) ³	-200 to 850°C	0.1°C	±0.025% of Reading + 0.3°C

Thermocouple² Types

Type	Range	Resolution	Accuracy
T	-200 to 400°C	0.1°C	±0.025 % of Reading + 1°C
J	-200 to 1200°C	0.1°C	±0.025 % of Reading + 1°C
K	-200 to 1372°C	0.1°C	±0.025 % of Reading + 1°C
N	-200 to 1300°C	0.1°C	±0.025 % of Reading + 1°C
R	300 to 1760°C	1°C	±0.025 % of Reading + 1°C
S	300 to 1760°C	1°C	±0.025 % of Reading + 1°C

Standard Delivery

- Instrument : 1 no.
- Power Cable : 1 no.
- Carrying Case : 1 no.
- Test Lead (2 wire): 1 no.
- Test Lead (3 wire): 1 no.
- Insertion Tube :
Dual Hole - 1 x 1/4" + 1 x 12.5 mm,
Dual Hole - 1 x 1/4" + 1 x 8.2 mm
- Insertion Tool : 1 no.
- Spare fuses : 6A - 2 nos.
- User Manual : 1 no.
- Traceable Calibration Certificate

Optional

- RS232 with RnD Cal-T Software
- Insertion Tube of size: 1 x 1/4" + 1 x 10 mm, 2 x 1/4" + 2 x 5 mm
- 110 VAC Power Supply
- Accredited (NABL) Calibration Certificate as per ISO/IEC 17025:2005 Standard

Technical Specification

Model	Range	Accuracy ¹	Bath Stability	Stabilisation Time	Heating Time	Cooling Time
350 UTC	50 to 350°C	±0.4°C	±0.05°C	15 Min.	50 to 350°C	350 to 100°C
					18 to 20 Min.	30 to 35 Min.
650 UTC	50 to 650°C	±0.6°C	±0.05°C	20 Min.	50 to 650°C	650 to 100°C
					30 to 32 Min.	40 to 45 Min.

Current terminal input protection: Fuse 100mA / 250V

Safety protection: Thermal cutout for bath temperature above 660°C

System Fuse: 6 A 250 V

Size: 155 mm (W) x 240 mm (H) x 350 mm (D)

Weight: 8 kgs.

Note 1: Accuracy specifications include effect of non-linearity, hysteresis and repeatability at 23±5°C

Note 2: Thermocouple measurement accuracy does not include CJC sensor accuracy (CJC error ±1.0°C)

Note 3: Measurement by 3 wire at an excitation current of 1mA

ACE INSTRUMENTS

(An ISO 9001-2008 Certified Company)

Plot No.77, Shaktipuram, Industrial Estate Kukatpally, Prashantinagar

Hyderabad – 500072, INDIA. Phones: +91-40-23078848, 23078849

Email: sales@alwaysace.com | Website: www.alwaysace.com

